12AY7

12AY7

MEDIUM-MU TWIN TRIODE

MINIATURE TYPE

GENERAL DATA

Electrical:

Heater, for Unipotential Cathodes:

Heater Arrangement	*Series*	*Parallel*	
Voltage	12.6*	6.3	ac or dc volts
Current	0.15	0.3	amp

Direct Interelectrode Capacitances (Without External Shield)—Each Unit:

Grid to Plate	1.3	μμf
Input	1.3	μμf
Output	0.6	μμf


Characteristics, Class A_1 Amplifier (Each Unit):

Plate Voltage	250	volts
Grid Voltage	-4	volts
Amplification Factor	40	
Plate Resistance (Approx.)	22800	ohms
Transconductance	1750	μmhos
Plate Current	3	ma
Grid Voltage (Approx.) for plate current of 10 μamp	-11	volts

Mechanical:

Mounting Position	Any
Maximum Overall Length	2-3/16"
Maximum Seated Length	1-15/16"
Length, Base Seat to Bulb Top (Excluding tip)	1-9/16" ± 3/32"
Maximum Diameter	7/8"
Bulb	T-6-1/2
Base	Small-Button Noval 9-Pin (JETEC No. E9-1)
Basing Designation for BOTTOM VIEW	9A

Pin 1 - Plate of Unit No.2
Pin 2 - Grid of Unit No.2
Pin 3 - Cathode of Unit No.2
Pin 4 - Heater
Pin 5 - Heater



Pin 6 - Plate of Unit No.1
Pin 7 - Grid of Unit No.1
Pin 8 - Cathode of Unit No.1
Pin 9 - Heater Mid-Tap

* Use of the 12.6-volt connection with an ac-heater supply is not recommended for applications involving low hum.

(continued on next page)

12AY7

12AY7

MEDIUM-MU TWIN TRIODE

AMPLIFIER—Class A_1

Values are for each unit

Maximum Ratings, *Design-Center Values:*

PLATE VOLTAGE	300 max.	volts
GRID VOLTAGE:		
Negative bias value	50 max.	volts
Positive bias value	0 max.	volts
PLATE DISSIPATION	1.5 max.	watts
CATHODE CURRENT	10 max.	ma
PEAK HEATER-CATHODE VOLTAGE:		
Heater negative with respect to cathode	90 max.	volts
Heater positive with respect to cathode	90 max.	volts


Typical Operation as Resistance-Coupled Amplifier:

See RESISTANCE-COUPLED AMPLIFIER CHART No.28 at front of Receiving Tube Section

12AY7

12AY7

AVERAGE PLATE CHARACTERISTICS
EACH UNIT

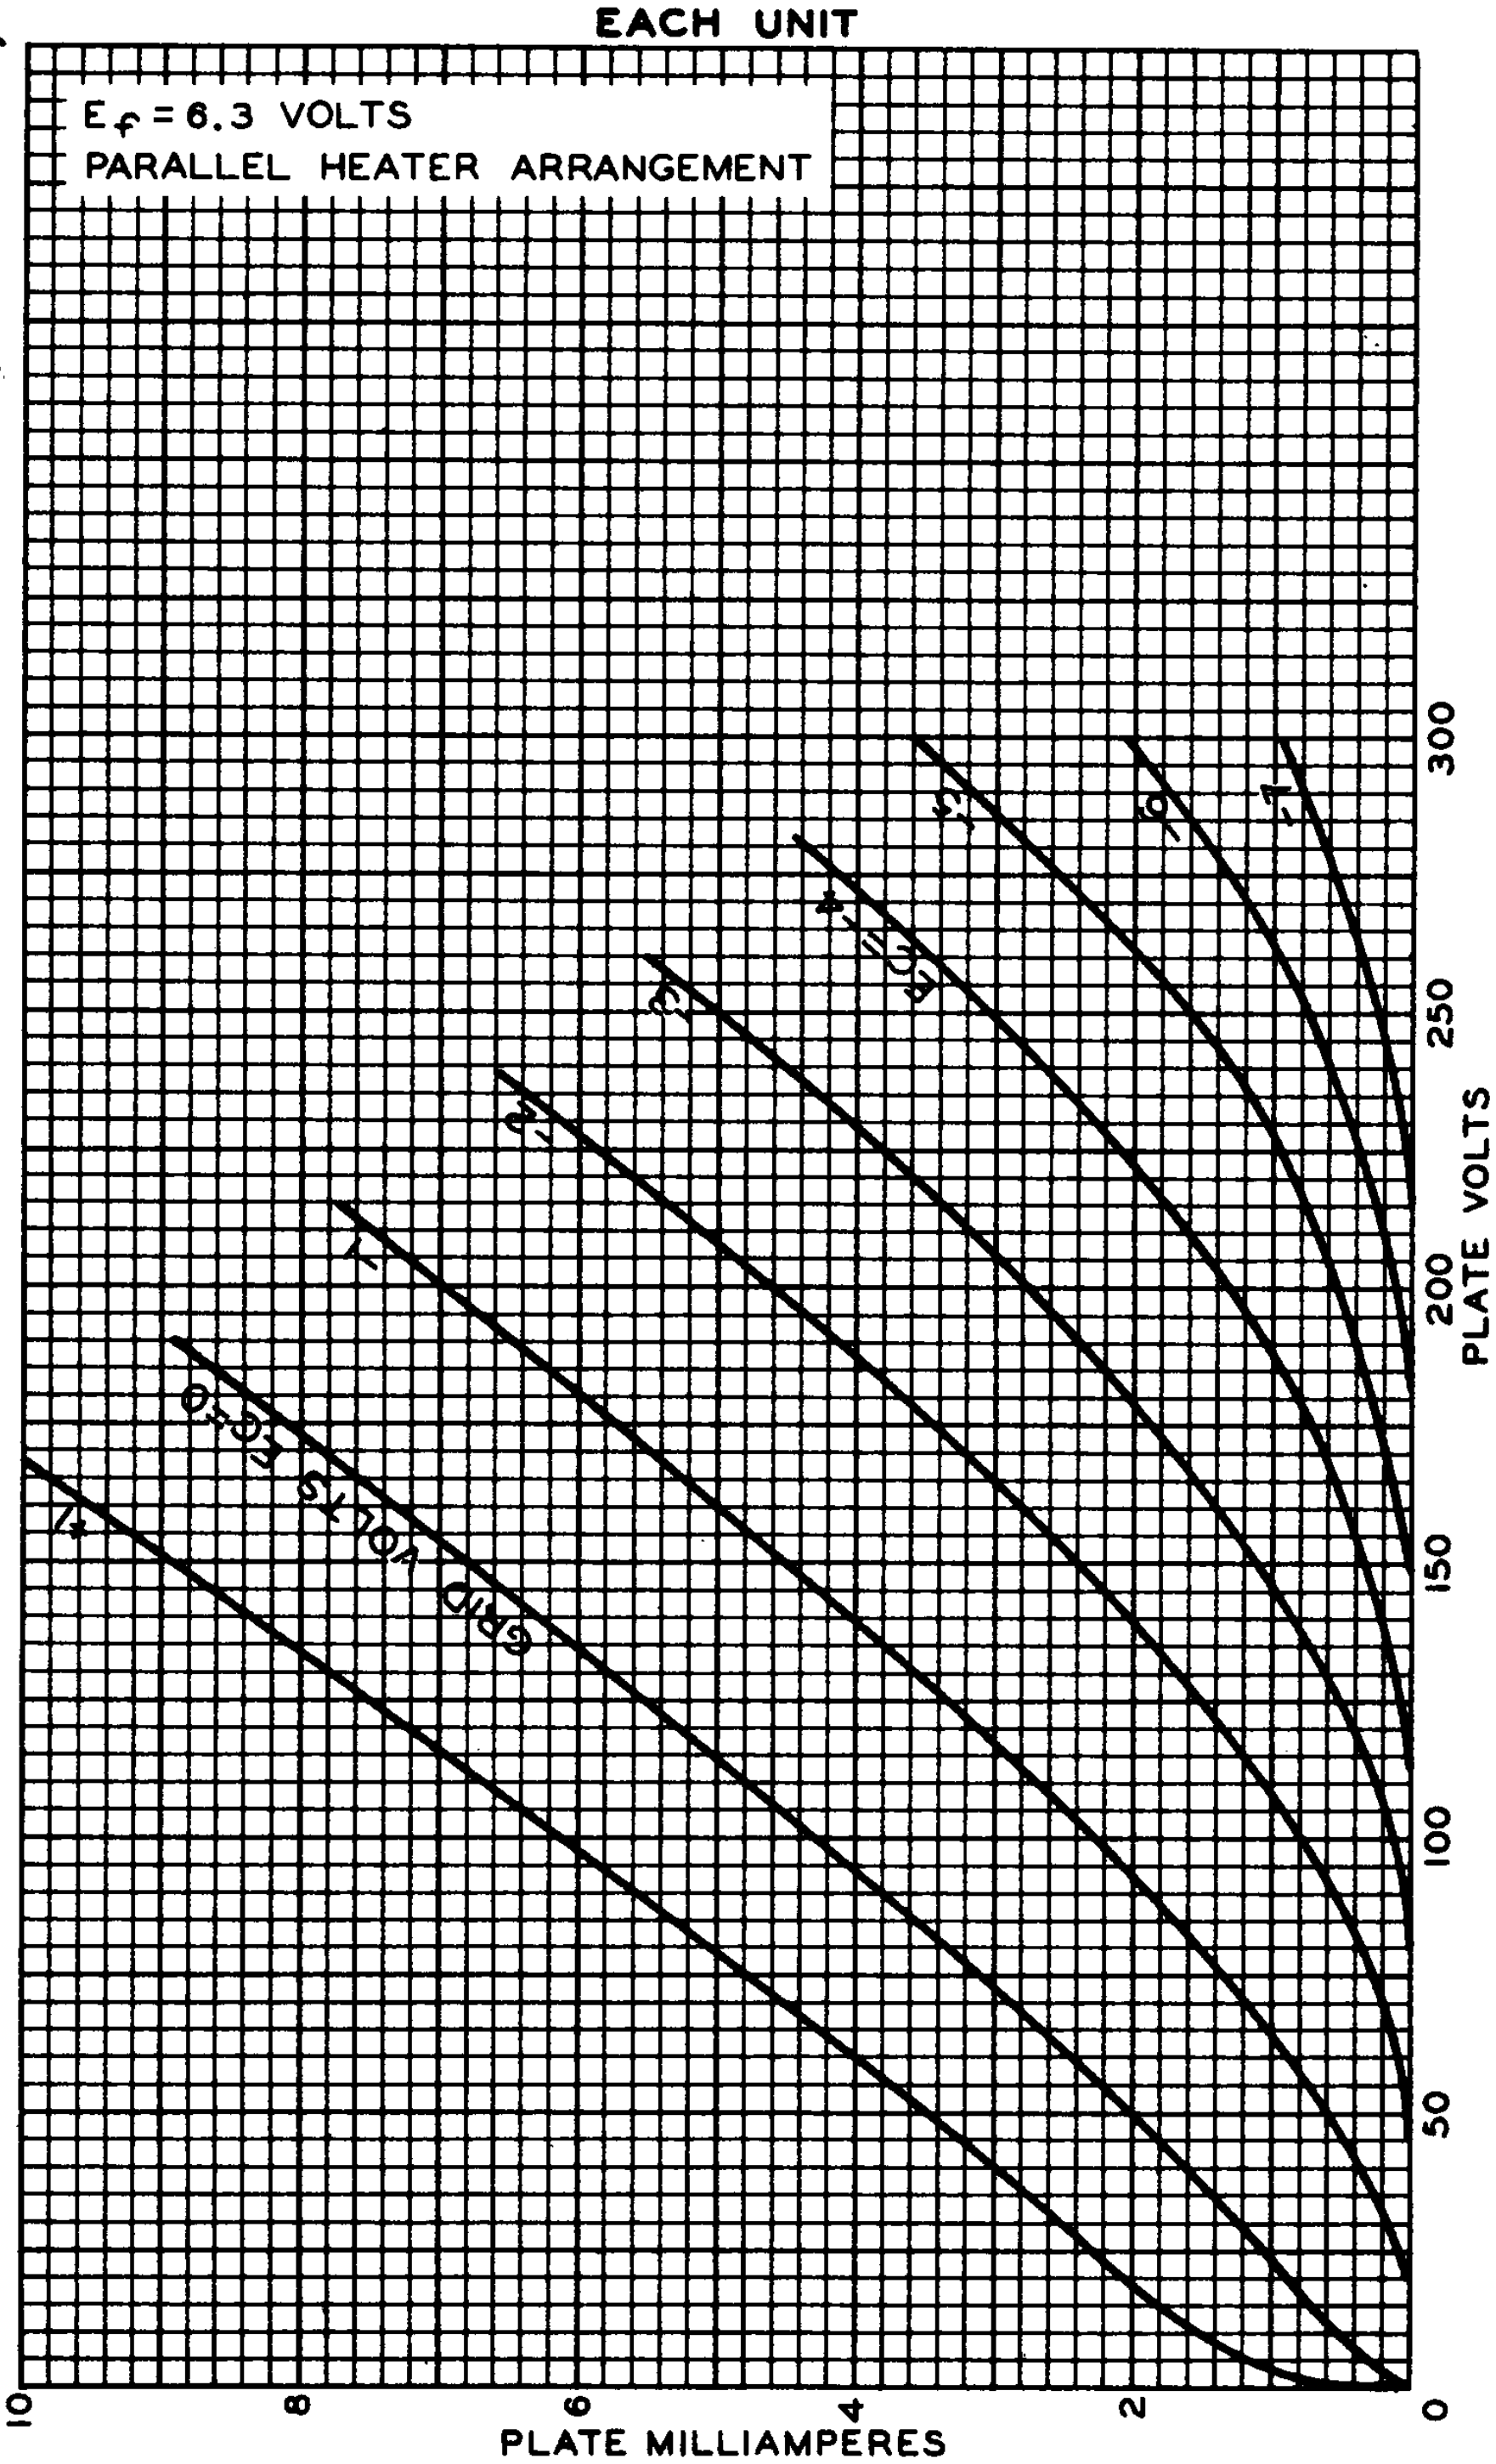

NOV. 5,1952

TUBE DEPARTMENT
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

92CM-7861